


Hi Smart
200*200*200

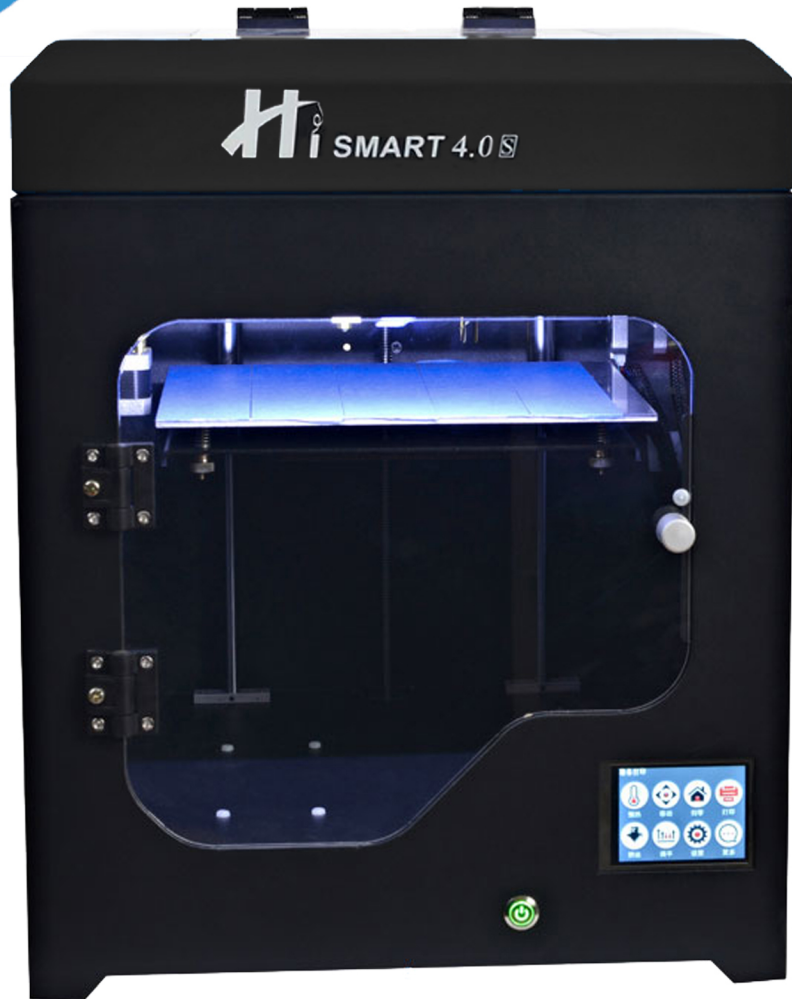

Shop Online

APPLICATIONS

- Schools & Educational Institutes
- Architecture & Designers
- Aerospace Field




Hi Smart 200*200*200



Dual Extruder With touchscreen

FEATURES

- Arcylic door,close printing environment
- New upgrade Extruder, ultra-high precision
- Aluminum platform, auxiliary leveling
- Filament break warning
- High accuracy Z lead screw
- Power off resume

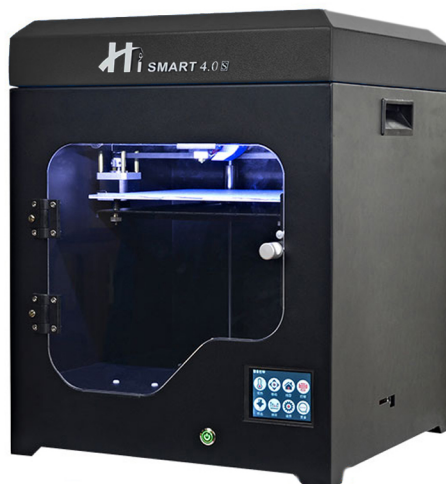

PRINTING

Printing Technology	FDM
Printing Size	200*200*200mm
Printing speed	<=200ms
Precision	±0.1mm
Layer thickness	0.05-0.4mm
Nozzle Diameter	Standard 0.4mm
Hotbed temperature	110°C
Extruder temperature	260°C
Working Mode	USD or SD Card
File format	STL\OBJ\GCode

SOFTWARE & ELECTRICAL

Power supply	360W/Output: 24V
Filaments	PLA/ABS/TPU/Carbon fiber
Filament diameter	1.75mm
Slicing software	Cura\Repetier-Host\ Simplify 3D
Display	3.2 inch Color Touch screen

MECHANICAL & DIMENSIONS

Extruder Quantity	Dual
Product Dimensions	390x370x485 mm