



Hi Smart
300*300*400

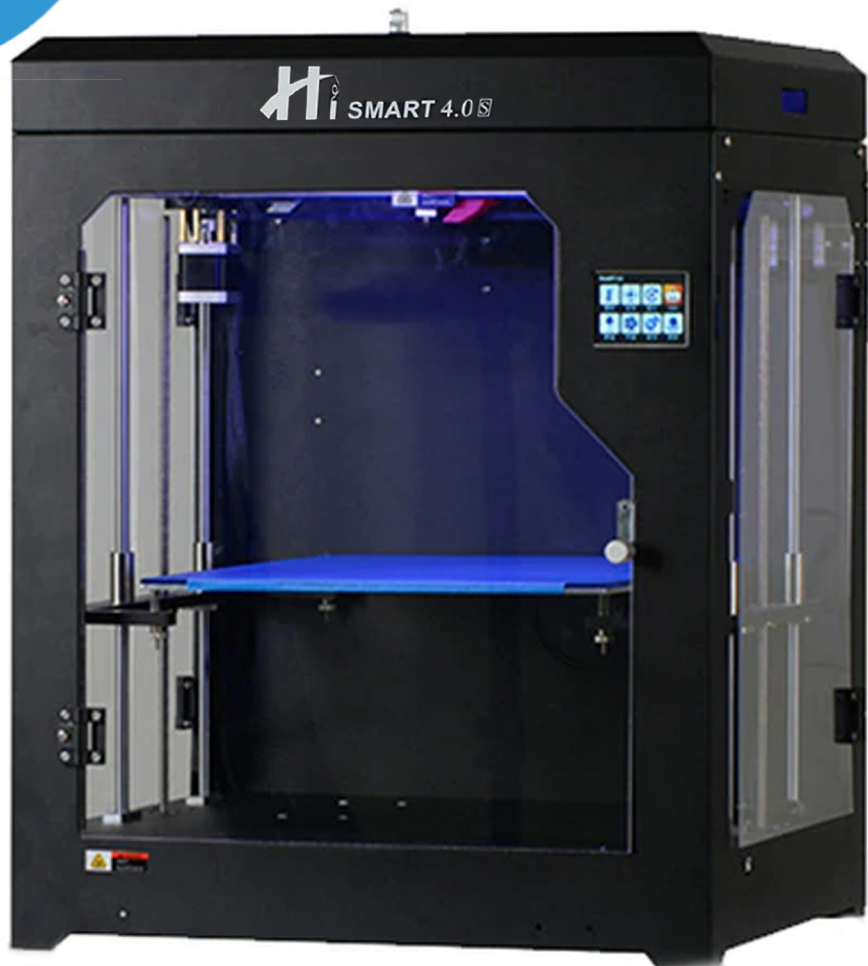

Shop Online

APPLICATIONS

- Schools & Educational Institutes
- Mechanical Field
- Aerospace Field





Hi Smart 300*300*400



Dual Extruder With touchscreen

FEATURES

- Arcylic door,close printing environment
- New upgrade Extruder, ultra-high precision
- Aluminum platform, auxiliary leveling
- Filament break warning
- High accuracy Z lead screw
- Dual axis transmissions

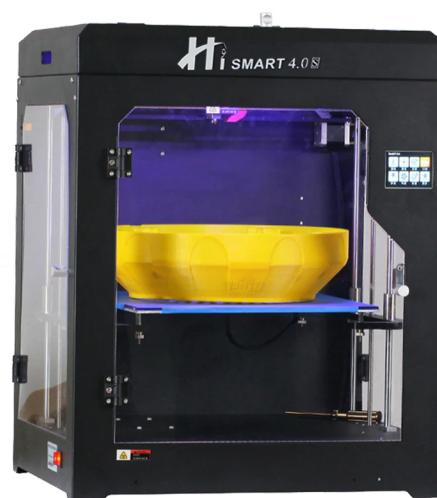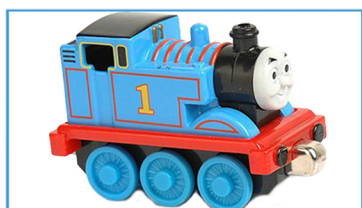

PRINTING

Printing Technology	FDM
Printing Size	300*300*400mm
Printing speed	180mm/s
Precision	±0.1mm
Layer thickness	0.05-03mm
Nozzle Diameter	Standard 0.4mm
Hotbed temperature	30-110°C
Extruder temperature	30-240°C
Working Mode	USD or SD Card
File format	STL\OBJ\GCode

SOFTWARE & ELECTRICAL

Input voltage	110V/220V
Output voltage	24V
Filaments	PLA/ABS/WOOD/TPU/METAL
Filament diameter	1.75mm
Slicing software	DK-Cura
Display	3.2 inch Touch screen

MECHANICAL & DIMENSIONS

Extruder Quantity	Dual
Product Dimensions	560x470x700mm